

INITIAL SETUP SPR-203



Version: 2.0

02/09/2021



TABLE OF CONTENT

1.	Introduction.....	3
1.1.	Commissioning steps	3
1.2.	Helpful documents	3
2.	SLOC Device Management (SDM)	4
2.1.	First login to the SDM portal	4
2.2.	App Download & Installation.....	4
3.	SLOC activating/deactivating.....	5
3.1.	Activating:	5
3.2.	Deactivating BLE Visibility:.....	5
3.3.	Transport mode	5
4.	SLOC Configuration	6
5.	SLOC Battery replacement /APP	13
6.	Check data transmission	16
6.1.	Download and install demo app	16
6.2.	Reading SPR-203 data with demo app.....	16
7.	Mounting.....	19
7.1.	SPR-203	19
7.2.	SPR-203 Reference.....	20
8.	Read out the data via BLE	21
8.1.	Package structure.....	21
8.2.	MAC - Adress	21
8.3.	Type	22
8.4.	Loading status	22
8.5.	Motion state.....	22
8.6.	Lifting height	23
8.7.	Distance in mm	23
8.8.	Acceleration (shock)	23
8.9.	Battery status in percent	24
8.10.	Current position	24
9.	Legal regulations.....	25
9.1.	Declaration of conformity	25
9.2.	Copyright	26
9.3.	Disposal.....	26



1. Introduction

Thank you very much for choosing SLOC.

In this documentation you will learn how to put your product into operation and evaluate the data.

We at SLOC are always trying to make our products as simple and intuitive as possible. However, should you encounter any problems, we are at your disposal.

E-Mail Address: support@sloc.one

1.1. Commissioning steps

The following steps must be completed to successfully configure the SLOC device:

1. Visit support.sloc.one
2. Download the commissioning documentation
3. Login/registration in the SDM portal ([Chapter 2.1](#))
4. SDM app installation on the Android device ([Chapter 2.2](#))
5. Wake up the SLOC with the magnet ([Chapter 3](#))
6. Configuration of the SLOC with the SDM app ([Chapter 4](#))
7. Check data transmission ([Chapter 5](#))
8. Mounting the SLOC on the vehicle ([Chapter 6](#))
9. Read out the data via BLE ([Chapter 7](#))

1.2. Helpful documents

[Download SLOC Software-Manual](#)




2. SLOC Device Management (SDM)

SLOC Device Management consists of a web portal (<https://sdm.sloc.one/>) and an Android app, which is needed for the configuration.

2.1. First login to the SDM portal

If you purchase your products through SLOC, you have been sent a registration email to register in the SDM portal and assign a password.

If you purchase the product via an external platform, please use the e-mail address with which the order was placed. You will find the password in the product packaging on the enclosed info sheet. You will then receive a registration link and can assign your password.

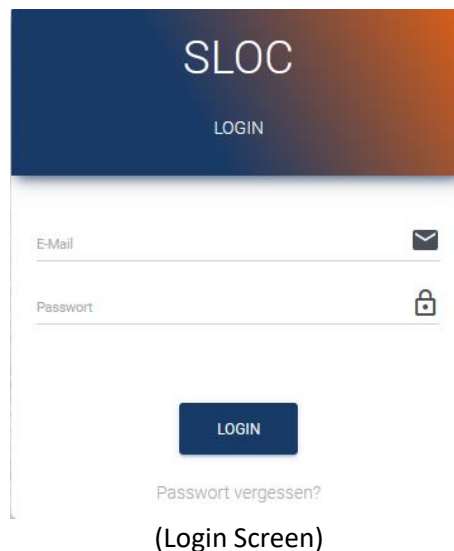

(Login Screen)



(SDM-Portal Homepage)

2.2. App Download & Installation

The app can be downloaded to a smartphone/tablet via the SLOC Support Center (<https://support.sloc.one>) on a smartphone/tablet by clicking on your product (SPR-203) and then downloading the APK file. This can be done directly from the smartphone/tablet or via a PC and USB cable. Afterwards the app can be installed.

For more information on APK installation, please refer to chapter 3 of the [SLOC Software Manuals](#) at support.sloc.one.




3. SLOC activating/deactivating

3.1. Activating:

To configure a SLOC, the transport mode of the SLOC must first be deactivated and/or the BLE visibility must be activated.

To do this, the magnet (included in the scope of delivery) must be placed on that side of the SLOC for at least 2s and, if necessary, moved back and forth on which the magnet symbol is shown (see illustration).

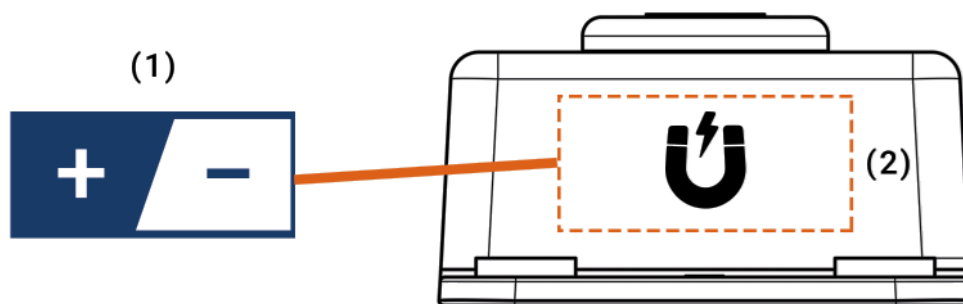

3.2. Deactivating BLE Visibility:

BLE communication is automatically disabled after 60 seconds. After that it can be reactivated with the magnet (see chapter 3.1).

3.3. Transport mode

The transport mode is the mode in which the SLOC is sent (i.e. the SLOC measures and sends no data and consumes no power).

To put an activated SLOC back into transport mode, select the SLOC in the SDM app and click the button "Transportmode on" under "ADVANCE".

4. SLOC Configuration


On the following pages the configuration of the SPR-203 is explained step by step with pictures. The SPR-203 Reference does not require any configuration.


IMPORTANT:

Be sure to configure the SLOC before assembly (see Chapter 5) and check the data transmission (see Chapter 4).

NOTE:

The BLE of the SLOC is deactivated after 60 seconds. If a SLOC is no longer accessible while using the app, wake it up again with the magnet (see chapter 2.1.).

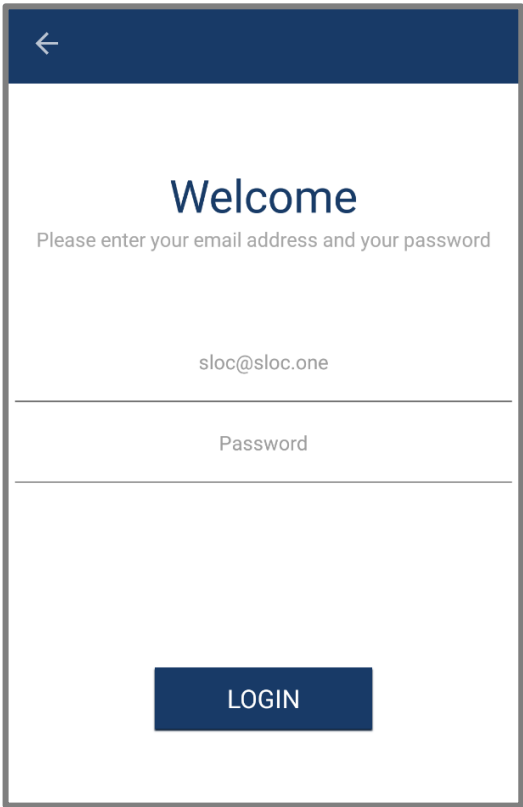	Registration in the SDM App: Use SLOC Device Management login data (see Chapter 1).
--	--

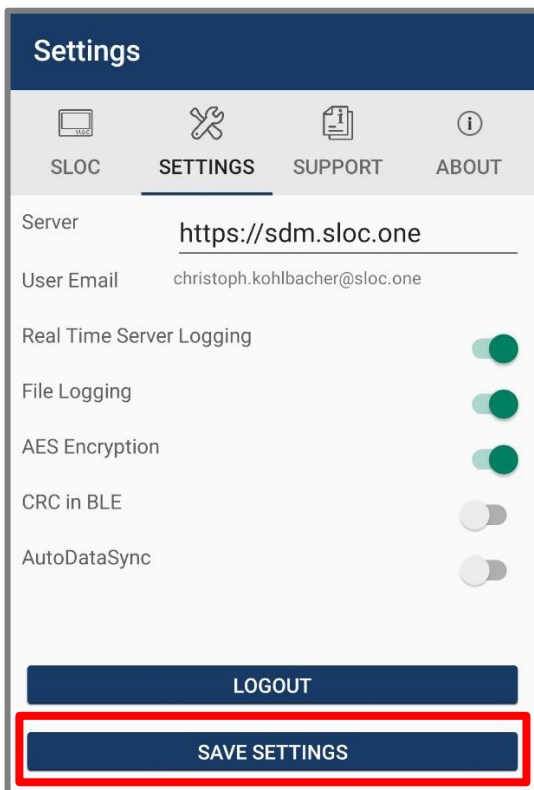

1. SETTINGS:


- Server must be <https://sdm.sloc.one>
- Other settings as in the picture on the left
- API Key, Organization UUID, Organization and Privileges vary depending on the app token used



2. Scan environment for SLOCs:

Wake up SLOC (see Chapter 2)
Then → **Click on SCAN**



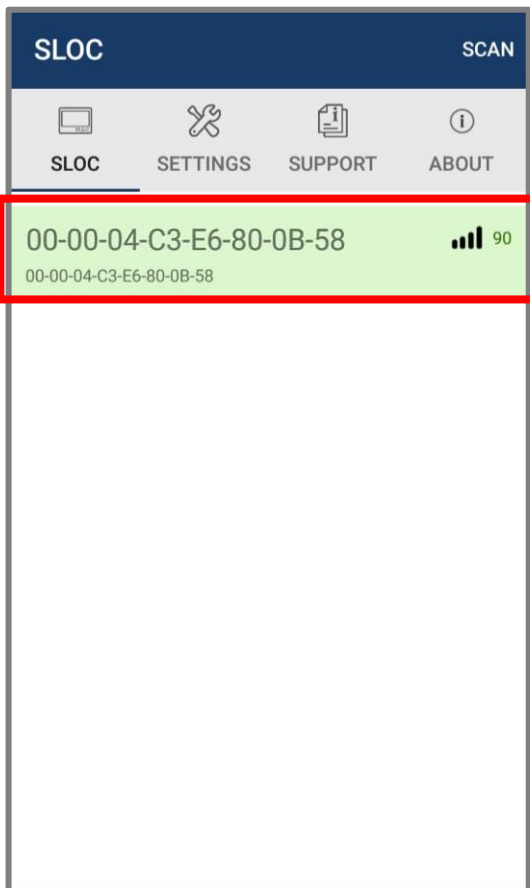


3. SLOC selection:

→ **Selection of the SLOCs**

→ using the MAC address
(see sticker on SLOC)

Note:

The BLE of the SLOC is deactivated after 60 seconds. If the app cannot establish a connection, the SLOC must be reactivated with the magnet.

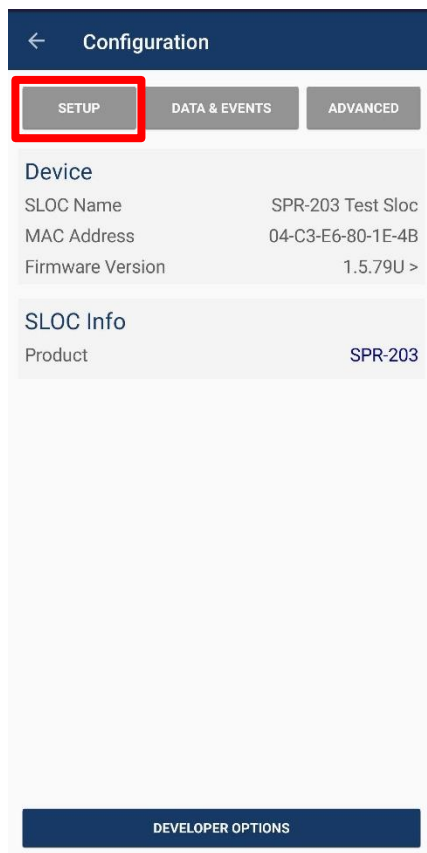

4. HOMEPAGE - SLOC

→ **Click SETUP**

Note:

If the SLOC has never been configured before, step 5 (setup page 1/2) is displayed directly.



← Configuration

SLOC Setup

MAC: 00-00-04-C3-E6-80-1E-4B

Common

Product: SPR-203

Name: SPR-203 Test Sloc

Location:

DEVELOPER OPTIONS SAVE

5. SETUP 1/2:

Product:

SPR-203 (cannot be changed)

Name:

Can be changed as desired

Location:

Optionally a location can be entered

→ **Click next to LOCATION**

← SLOC Setup - Location

CURRENT LOCATION VIA GPS

Location

Street: Waltendorfer Gürtel 2

Zip Code: 8010

City: Graz

Country: Österreich

GPS

FROM LOCATION INFORMATION

Latitude: 47.06277

Longitude: 15.45710

SAVE CANCEL

Note: Steps 6-7 are only displayed when clicking next to LOCATION and can be skipped if no location is desired.

6. LOCATION 1/2:

Variant 1 (directly at the location):

→ Switch on GPS

→ **Click on CURRENT LOCATION VIA GPS**

→ Wait - GPS needs some seconds

Variant 2 (in preparation):

→ Enter address

→ exactly according to the following scheme:
address: house number, postal code, city,
country

→ **Click on FROM LOCATION INFORMATION**

→ wait until GPS coordinates are loaded

← SLOC Setup - Location

CURRENT LOCATION VIA GPS

Location

Street Waltendorfer Gürtel 2

Zip Code 8010

City Graz

Country Österreich

GPS FROM LOCATION INFORMATION

Latitude 47.06277

Longitude 15.45710

SAVE CANCEL

7. LOCATION 2/2:

→ Check the address for "Current Location via GPS"

→ if the address is not correct, change it manually

→ Click on **SAVE**

← Configuration

SLOC Setup

MAC: 00-00-04-C3-E6-80-1E-4B

Common

Product SPR-203

Name SPR-203 Test Sloc

Location

DEVELOPER OPTIONS **SAVE**

8. SETUP 1/2

→ Click on **SAVE**

 Configuration

SLOC Setup 2/2

00-00-04-C3-E6-80-1E-4B

Parameter Configuration

Load State	☒
Max. Distance for status 'loaded'	500 mm
Check Interval for load state	5 sec
Beacon Localization	☒
Height Measurement	☒
Calibration	☒
Interval for Calibration	1 min
Reference SLOC MAC	04:C3:E6:80:00:00
Interval for Sleep Time	120 min

DEVELOPER OPTIONS

CONFIRM

Load State:

Enabled: Load state is measured and determined in intervals

Max. Distance for status "loaded"

Distance (in mm) from SLOC at which the condition is considered loaded

Check Interval for load state:

Time interval (in sec) in which the load state is redefined

Beacon Localization:

Activated: SLOC permanently scans for SPR-203 reference near the position determination

Height Measurement:

Activated: SLOC measures and advertises its lifting height when moving

Calibration:

Active: SLOC calibrates its current height to 0mm after some downtime

Interval for Calibration:

Time in minutes, which the SLOC must stand still to calibrate to 0mm. (If the actual measured lift height is more than 500mm, the double time is waited until calibration)

Reference SLOC MAC:

MAC address of the corresponding SPR-203 reference.

Interval for Sleep Time

Time in minutes, which the Sloc must be immobilized to enter the energy saving sleep mode. (must be greater than twice the Calibration Time!)

→ Click on Confirm



← Configuration

SETUPDATA & EVENTSADVANCED

Device

SLOC NameSPR-203 Test Sloc

MAC Address04-C3-E6-80-1E-4B

Firmware Version1.5.79U >

SLOC Info

ProductSPR-203


DEVELOPER OPTIONS

16. CONFIGURATION COMPLETED

Before assembly (see Chapter 5), the data transmission should be checked (see Chapter 4).




5. SLOC Battery replacement /APP

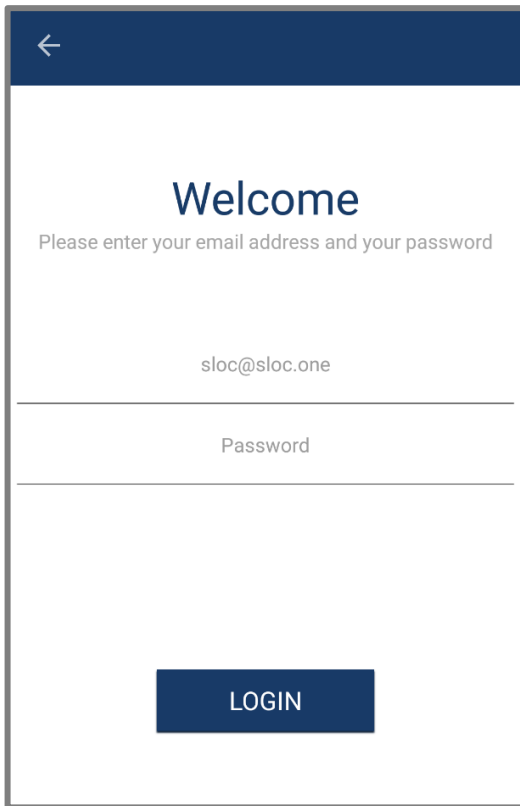

Registration in the SDM App:


Use SLOC Device Management login data (see Chapter 1).

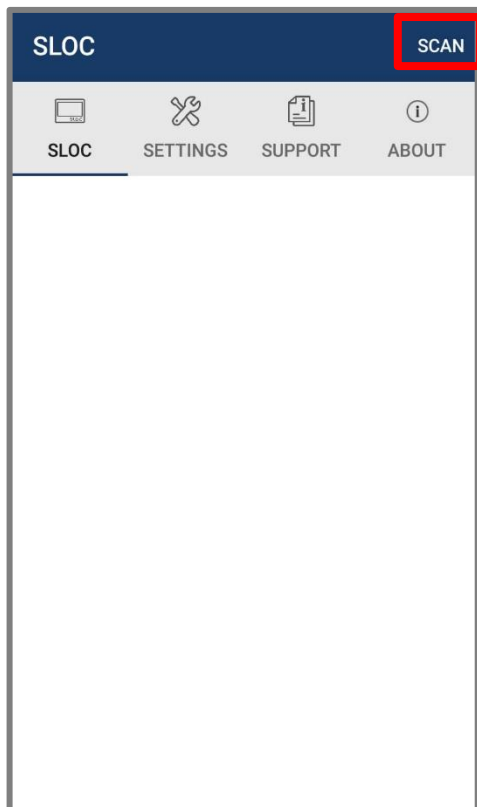

2. Scan environment for SLOCs:

Wake up SLOC (see Chapter 2)
Then → **Click on SCAN**



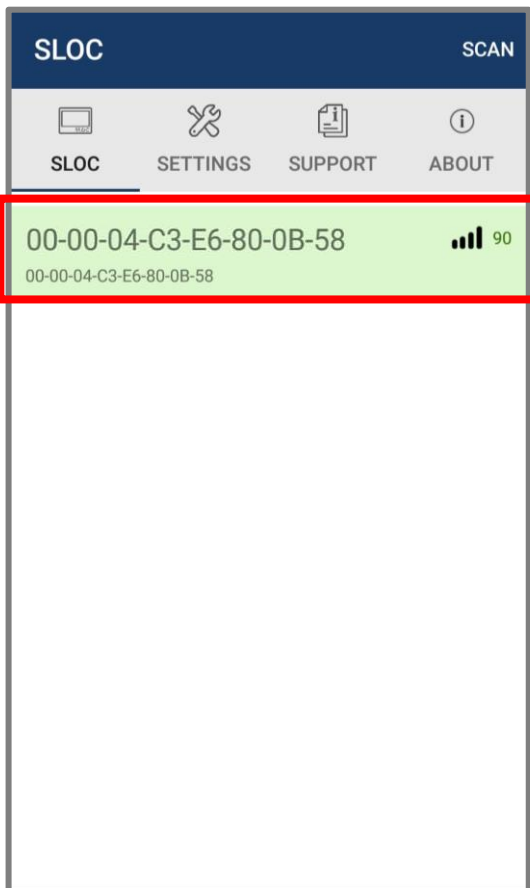


3. SLOC selection:

→ Selection of the SLOCs

→ using the MAC address
(see sticker on SLOC)

Note:


The BLE of the SLOC is deactivated after 60 seconds. If the app cannot establish a connection, the SLOC must be reactivated with the magnet.

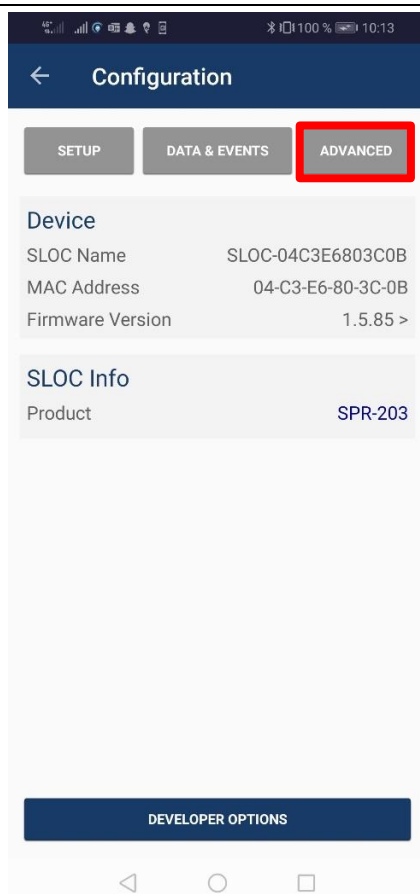

4. HOMEPAGE - SLOC

→ Click on advanced




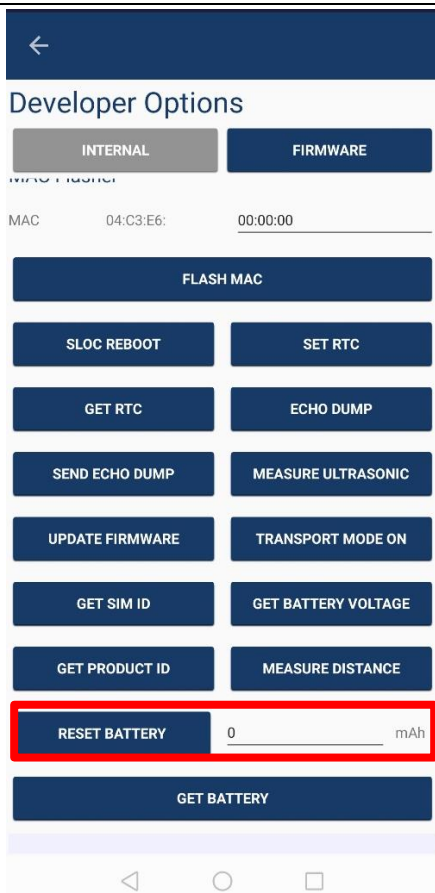

4. Developer Options

Enter the battery value (e.g. 3500 mAh)

→ Click on “Reset Battery”

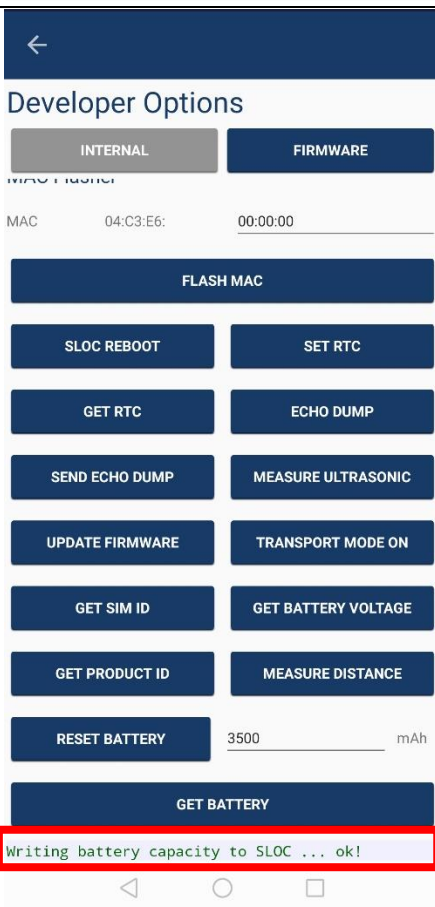

5. BATTERY REPLACEMENT COMPLETED




6. Check data transmission

6.1. Download and install demo app

The app can be downloaded to a smartphone/tablet via the SLOC Support Center (<https://support.sloc.one>) on a smartphone/tablet by clicking on your product (SPR-203) and then downloading the APK file. This can be done directly from the smartphone/tablet or via a PC and USB cable. Afterwards the app can be installed.

6.2. Reading SPR-203 data with demo app

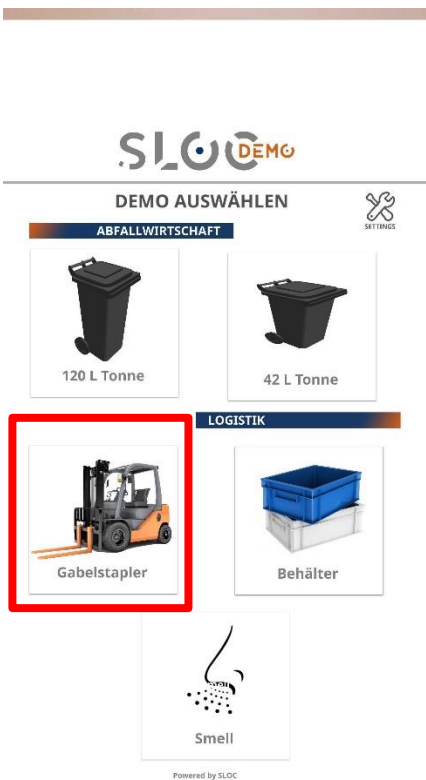

1. Forklift

→ Click on forklift

App Einstellungen

Forklift Cockpit

MAC: 04:C3:E6:80:00:01 File Logging

Temp Max: 30 **Temp Min:** 10

Luftfeuchtigkeit: 50 **Position:** SLOC GmbH
Waltendorfer Gürtel 2
8020 Graz

Slocs in Reichweite:

04:C3:E6:8F:F0:59 04:C3:E6:8F:F0:21

04:C3:E6:80:1E:4B

Zurück zur Use Case Auswahl

2. Select SPR-203 MAC

→ Click on MAC address of SPR-203
(queries the advertising of this sloc)

App Einstellungen

Forklift Cockpit

MAC: 04:C3:E6:80:00:01 File Logging

Temp Max: 30 **Temp Min:** 10

Luftfeuchtigkeit: 50 **Position:** SLOC GmbH
Waltendorfer Gürtel 2
8020 Graz

Slocs in Reichweite:

04:C3:E6:8F:F0:59 04:C3:E6:8F:F0:21

04:C3:E6:80:1E:4B

Zurück zur Use Case Auswahl

3. Close connection window

→ Click on SLOC symbol



4. Verify data

Here now all data are shown, which are advertised.

(Lifting height is only displayed if SPR-203 is within reach and correctly set in setup)

(To calibrate lifting height at current height to 0mm, hold a magnet at the side of the magnet symbol of the Sloc for about 3 seconds)


7. Mounting

7.1. SPR-203

The SLOC is mounted in the center of the fork using SLOC Easy Mount brackets (see chapter 6.2) or cable ties (see illustrations).

Mounting instructions:

- The SLOC must be mounted with the logo visible at the top
- Distance between sensor and pallet / container should be at least 5cm
- The measuring range of the ultrasound must not be blocked by an object

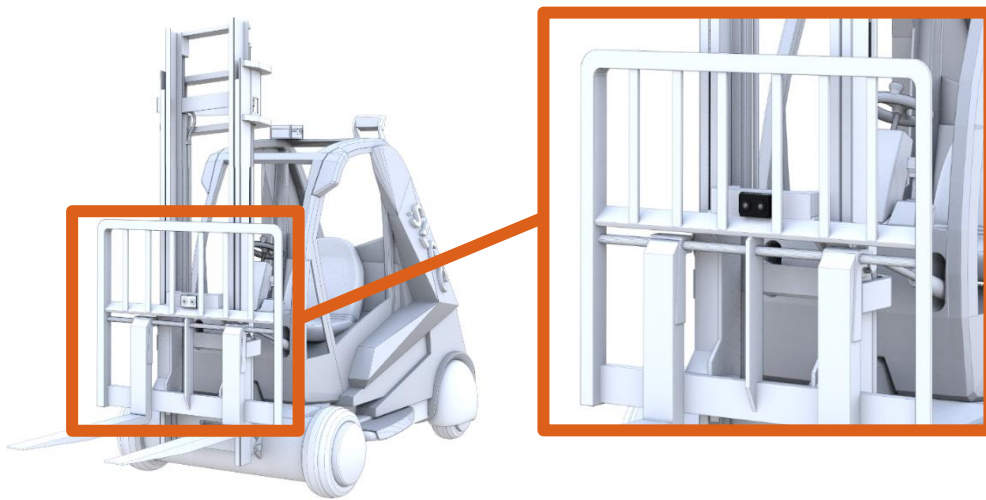

SLOC Easy Mount:

- 2 SLOC Easy Mount brackets are included in delivery.
- With these brackets an easy installation is guaranteed.
- The SLOC can be quickly removed thanks to the clip holder and e.g. batteries can be changed.



Mounting with cable ties:



7.2. SPR-203 Reference

The associated SPR-203 Reference should be mounted as close as possible and preferably at the same height as the SPR-203.

For this purpose, cable ties or the SLOC Easy Mount brackets can be used. The SPR-203 Reference should be mounted in a non-moving location (no lift) and only needs to be activated (no configuration required).

8. Read out the data via BLE

In this chapter the structure of the advertisement package, which the SLOC sends via BLE, is described in detail.

8.1. Package structure

Byte	Content
0 bis 6	HEADER
7 bis 12	MAC Address
13	Type - 0x08
14	Loading condition
15	Motion state
16 bis 17	Lifting height
18 bis 19	Distance
20 bis 23	Acceleration (shock)
24	Battery status in percent
25 bis 30	MAC of the Location Beacon

Except for the own MAC address (Byte 7 to 12) all data types are transmitted in Big Endian format.

Example - Complete BLE package including header:

Adv PDU Type	Adv PDU Header				AdvA	AdvData
	Type	TxAdd	RxAdd	PDU-Length		
ADV_IND	0	0	0	37	0x04C3E68015AF	02 01 05 1B FF FF FF AF 15 80 E6 C3 04 05 01 01 00 00 00 3C 3F 64 77 BE 00 04 C3 E6 8F F0 52

8.2. MAC - Address

For compatibility reasons with the SLOC configuration - APP the MAC address is also transferred in the payload.

Example – MAC 04:C3:E6:80:15:AF

AdvData															
02	01	05	1B	FF	FF	FF	FF	AF	15	80	E6	C3	04	05	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	



8.3. Type

The type depends on the SLOC product used. The SPR-203 described in this document uses type 0x08.

Datatype: uint8

Example – Type 0x08:

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	

8.4. Loading status

If an object is detected within 30cm, the status changes to Load.

0... Unloaded

1... Loaded

Datatype: uint8

Example – Loaded (0x01):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	

8.5. Motion state

0... Standstill

1... Motion

Datatype: uint8

Example – Moved (0x01):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	



8.6. Lifting height

The lifting height is transmitted in millimeters (mm). If the SLOC does not support lift height measurement, 0x0000 is always transmitted. If the reference SLOC cannot be reached, 0x8000 is transmitted.

Datatype: int16

Example – 0mm (0x0000):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	

8.7. Distance in mm

The distance measurement to the object is transmitted in millimeters (mm).

Datatype: uint16

Example – 60mm (0x003C):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	

8.8. Acceleration (shock)

The maximum acceleration that has occurred within the last 5 seconds is given in G.

Datatype: float (IEEE-754)

Example – 0.89G (0x3F6477BE):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	



8.9. Battery status in percent

The charge level of SLOC batteries in percent

Datatype: uint8

Example – Battery status 82% (0x52):

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	52	04	C3	E6	8F	F0	52	

8.10. Current position

MAC address of a recognized SBC-203. If several SLOC - Beacons are recognized at the same time, the one with the largest signal strength is selected. If no SLOC beacon is detected, 00:00:00:00:00:00 is advertised.

Datatype: 6 Byte

Example – Beacon MAC 04:C3:E6:8F:F0:52

AdvData															
02	01	05	1B	FF	FF	FF	AF	15	80	E6	C3	04	05	01	01
00	00	00	3C	3F	64	77	BE	00	04	C3	E6	8F	F0	52	



9. Legal regulations

9.1. Declaration of conformity

Any changes or modifications not expressly approved by SLOC could void the user's authority to operate this equipment. There are no serviceable parts included.

EC – Konformitätserklärung / EC – Declaration of Conformity

SLOC GmbH Waltendorfer Gürtel 2, 8010 Graz, Austria, +43 316 395 396, office@sloc.one

SLOC GmbH hereby declares that the product

Basic Model:	SLOC-200-1
Hardware Type:	SLOC-200 ALL Components
Series:	200
Side Models:	SWB-200, SSC-200, SPR-200, STR-200, SLC-200, SCT-200, SMO-200

to which this declaration relates is in accordance with the provision of the following directives:

2014/53/EU Radio Equipment Directive-RED

2011/65/EU ROHS Directive on the restriction of the use of certain hazardous substances in electrical and electronic equipment and is in conformity with the following standards or other normative documents:

EN 62368-1:2014/AC:2015	Audio/video, information and communication technology equipment — Part 1: Safety requirements Electromagnetic compatibility and radio spectrum Matters (ERM); Part 1: Common technical requirements
EN 62311:2008	Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz-300 GHz))
EN 301 489-1 V1.9.2	Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
EN 301 489-3 V1.6.1	Electromagnetic compatibility and Radio spectrum Matters (ERM), Electromagnetic Compatibility (EMC) standard for radio equipment and services, -- Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz
EN 301 489-52 V1.1.0	Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication Mobile and portable (UE) radio and ancillary equipment
EN 300 440 V2.1.1	Short Range Devices (SRD); Radio equipment to be used in the 1 GHz to 40 GHz frequency range
EN 301 511 V12.5.1	Global System for Mobile communications (GSM); Mobile Stations (MS) equipment; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU
EN 50581:2012	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances



9.2. Copyright

The information and data contained in these documents, including references to URLs and other websites, are subject to change without notice.

This document does not grant you any legal rights to the intellectual property of SLOC products. You are authorized to copy and use this document for your internal purposes and for reference. © 2020 SLOC GmbH

Haftungsausschluss / Disclaimer of liability

In this manual are descriptions for copyrighted products that are not explicitly indicated as such. The absence of the trademark (®) and copyright (©) symbols does not imply that a product is not protected. Additionally, registered patents and trademarks are similarly not expressly indicated in this manual.


The information in this document has been carefully checked and is believed to be entirely reliable. However, SLOC GmbH assumes no responsibility for any inaccuracies. SLOC GmbH neither gives any guarantee nor accepts any liability whatsoever for consequential damages resulting from the use of this manual or its associated product. SLOC GmbH reserves the right to alter the information contained herein without prior notification and accepts no responsibility for any damages which might result.

Additionally, SLOC GmbH offers no guarantee nor accepts any liability for damages arising from the improper usage or improper installation of the hardware or software. SLOC GmbH further reserves the right to alter the layout and/or design of the hardware without prior notification and accepts no liability for doing so.

© Copyright 2020 SLOC GmbH, 8010 Graz, Austria.

Rights - including those of translation, reprint, broadcast, photomechanical or similar reproduction and storage or processing in computer systems, in whole or in part - are reserved. No reproduction may occur without the express written consent from SLOC GmbH.

9.3. Disposal




This symbol on the product, the batteries or the packaging means that this product and the batteries it contains must not be disposed of with household waste. Instead, you must dispose of the products and batteries at an appropriate collection point for the recycling of batteries, waste electrical and electronic equipment.

Separate collection and recycling contributes to the preservation of natural resources and prevents harm to human health and the environment from hazardous substances that can be released during the improper disposal of batteries and electrical and electronic equipment.

For more information about collection points for batteries, electrical and electronic equipment, contact your city/municipality administration, waste disposal company, or the dealer from whom you purchased this product.

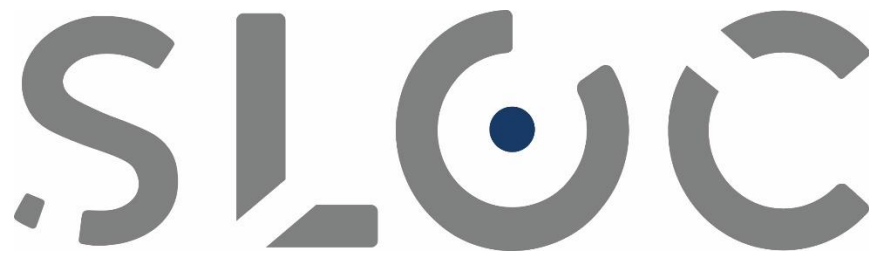

**SLOC GmbH**

Waltendorfer Gürtel 2

8010 Graz

Österreich / Austria

+43 316 395 396

support@sloc.one

